


Globe Power's GP270K Cube Lighting Tower features highly efficient LED lights and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works, and is compliant with metropolitan and mining required specifications.



PRODUCT SPECIFICATIONS

GENERAL

Model	GP270K Cube
Lumen Output	270,000
Mast Height	26.2 feet (max)
Mast Type	Multi-section, telescoping
Lights	2 x 900W LED (Dimmable)

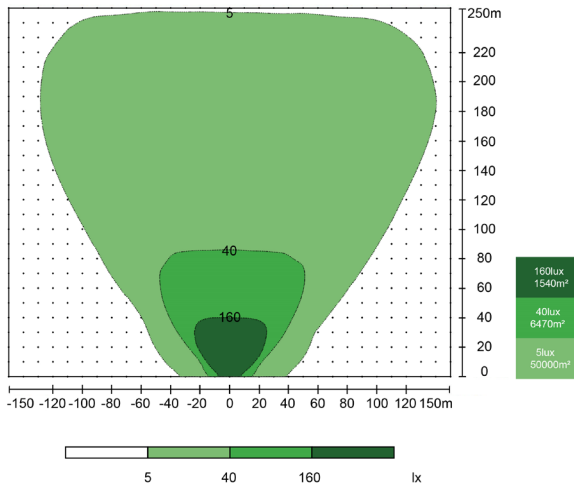

UNIT INFORMATION

Dimensions (Stowed)	49.6" x 47.6" x 100.4" (LxWxH)
Dimensions (Deployed)	98.4" x 96.9" x 316.7" (LxWxH)
Weight	2,711.7lbs
Lifting Points	1

GENSET

Generator	Perkins 403D-11G
Genset Output	4.3kW DC 48V
Fuel Type	Diesel
Fuel Tank Capacity	34.3Gal, fully bunded
Fuel Consumption	0.3Gal/hr
Running Time	82 hours
Alternator	Sincro SMD132B
Noise Level	65dB at 23ft
Control Panel	Smartgen lighting tower controller

OPERATIONAL

Wind Rating	62.1mi/h
Mast Operation	Hydraulic lifting system
Mast Rotation	180° Manual rotation
Stabilisers	4 x Manually adjustable

FEATURES & OPTIONS

- Dusk sensor
- Jump start receptacle
- Level Sensor
- Isolators
- Fire extinguisher
- Trimming alarm
- Jack pads
- Door safety switches
- Quick mount trailer optional

