




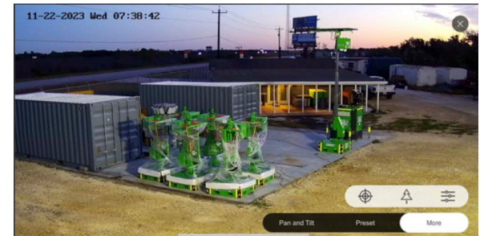

**KEY FEATURES**

- 7 day timer
- Day/night modes
- Fire extinguisher
- Emergency stop
- Battery isolator
- Adjustable solar tilt
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Folding drawbar

 **EASE OF TRANSPORT**

 **COST EFFECTIVE**

 **SOLAR POWERED**



**PRODUCT SPECIFICATIONS**

**GENERAL**

Model	GP28K - CCTV Eco
Lumen Output	28,000
Mast Height	24.6 feet
Mast Type	Hydraulic/Cable
Lights	1 x 200w LED Modules
Coverage	600m <sup>2</sup> at 5 lux

**OPERATIONAL DATA**

Wind Rating	62.1mi/h
Working Temperature	32°F to 122°F
Stabiliser Supports	4 x Manual

**BATTERY**

Battery	10.8kWh Deep Cycle Gel
Runtime	30 Hours
Solar	1.23kWp
Solar Tilt	30° to 45°
Efficiency (solar)	1 hr of sun / 3 hours of light

**CAMERA**

Camera Quality	1x 4MP 25x PTZ
Lens	1x 0.19" to 4.72" Adjustable Focus
Recording Time	12 weeks continuous recording on 4TB Hard Drive
Monitoring (Live/ Playback)	Phone App or PC/Cloud
Features	Scheduled recordings, Email/App alerts, Movement/Smart event Detection, false alarm reduction/ vehicle-person recognition

**UNIT INFORMATION**

Dimensions (Towing)	123.6" x 59.1" x 114.2" (LxWxH)
Dimensions (Stowed)	86.6" x 59.1" x 114.2" (LxWxH)
Dimensions (Deployed)	86.6" x 59.1" x 301.2" (LxWxH)
Weight	3,196.7lbs
Trailer Type	Single Axle
Tyre/Rim Size	215/70R15