

DIESEL LIGHTING TOWER GP270K CUBE




Globe Power's GP270K Cube Lighting Tower features highly efficient LED lights and a safe 48V DC voltage for industry leading fuel savings. It is suitable for mining operations, construction projects, events, civil and road works, and is compliant with metropolitan and mining required specifications.

PRODUCT SPECIFICATIONS

GENERAL

Model	GP270K Cube
Lumen Output	277,000
Mast Height	26 feet (max)
Mast Type	Multi-section, telescoping
Lights	2 x 900W LED (Dimmable)

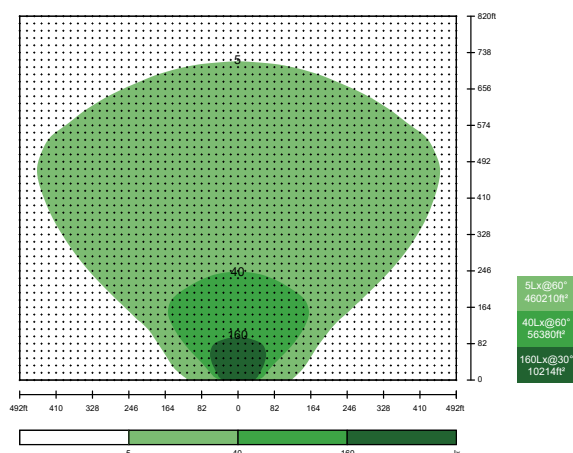

GENSET

Generator	Kubota D1105-BG
Genset Output	4.3kW DC 48V
Fuel Type	Diesel
Fuel Tank Capacity	61Gal, fully bunded
Fuel Consumption	0.21Gal/hr
Running Time	238 hours
Alternator	Meccalte PM5G
Noise Level	65dB at 23ft
Control Panel	Smartgen lighting tower controller

FEATURES & OPTIONS

- Dusk sensor
- Jump start receptacle
- Level Sensor
- Isolators
- Quick mount trailer optional
- Fire extinguisher
- Trammig alarm
- Jack pads
- Door safety switches

UNIT INFORMATION

Dimensions (Stowed)	49" x 48" x 100" (LxWxH)
Dimensions (Deployed)	98" x 96" x 297" (LxWxH)
Weight	2,899lbs
Lifting Points	1

OPERATIONAL

Wind Rating	75mph
Mast Operation	Hydraulic lifting system
Mast Rotation	180° Manual rotation
Stabilisers	4 x Manually adjustable

GPUSA-GP270K-Cube-V3-1125