




Globe Power's GP56K Eco Solar Lighting Tower has been built to suit various industries and is compliant with both metropolitan and mining specifications.


- 7 day timer
- Day/night modes
- Folding drawbar
- Solar tilt
- Fire extinguisher
- Emergency stop
- Isolator
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Mudguards



PRODUCT SPECIFICATIONS

GENERAL

Model	GP56k - Eco
Lumen Output	56,000
Mast Height	25 feet
Mast Type	Hydraulic/Cable
Lights	4 x 120w LED Modules (Dimmable)
Coverage	86,111ft ² at 5 lux

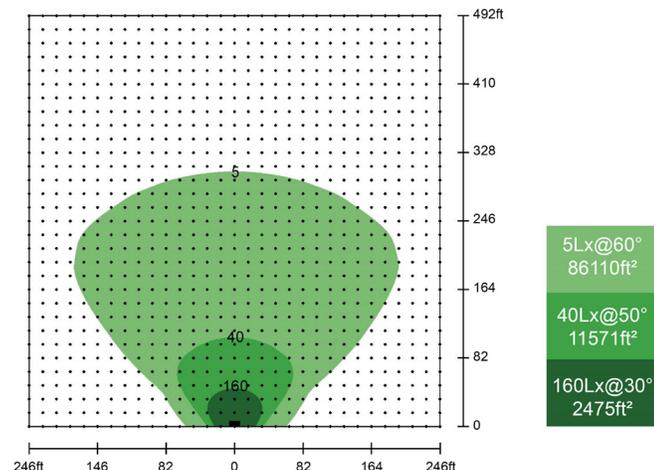

OPERATIONAL DATA

Wind Rating	62mph
Working Temperature	32 to 122°F
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	10.8kWh Deep Cycle Gel
Run Time	30 hours
Solar	1.23kWp
Solar Tilt	30° to 45°
Solar Efficiency	1 hour of sun/3 hours of light

UNIT INFORMATION

Dimensions (Towing)	124" x 59" x 117" (LxWxH)
Dimensions (Deployed)	87" x 136" x 301" (LxWxH)
Dimensions (Stowed)	87" x 59" x 117" (LxWxH)
Weight	3,197lbs
Trailer Type	Single Axle
Security	Hitch locks, security wheel nuts