



# SOLAR HYBRID LIGHTING TOWER GP56K-H ECO HYBRID



## KEY FEATURES

Globe Power's GP56K Eco Hybrid Solar Lighting Tower has been built to suit various industries and with a Hatz backup engine it can run in any weather.

- 7 day timer
- Day/night modes
- Folding drawbar
- Solar tilt
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Wheel chocks
- Tie down points
- Lifting points
- Mudguards



## PRODUCT SPECIFICATIONS

### GENERAL


Model	GP56k-H Eco Hybrid
Lumen Output	56,000
Mast Height	25 feet
Mast Type	Hydraulic/Cable
Lights	4 x 120w LED Modules (Dimmable)
Coverage	86,110 ft <sup>2</sup> at 5 lux

### OPERATIONAL DATA

Wind Rating	62mph
Working Temperature	32 to 122°F
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual
Battery	5.9kWh Lithium LiFePO4
Run Time	15 hours from battery
Solar	1.23kWp
Solar Tilt	30° to 45°
Efficiency	1 hour of sun/3 hours of light 1 hour of engine/5 hours of light
Fuel Consumption	6.7 fl. oz/hr
Fuel Capacity	13.3 gallons

### UNIT INFORMATION

Dimensions (Towing)	124" x 60" x 117" (LxWxH)
Dimensions (Deployed)	87" x 136" x 302" (LxWxH)
Dimensions (Stowed)	87" x 60" x 115" (LxWxH)
Weight	3,197lbs
Trailer Type	Single Axle
Tyre & Rim Size	215/70R15
Security	Wheel/hitch locks, wheel clamp, security wheel nuts

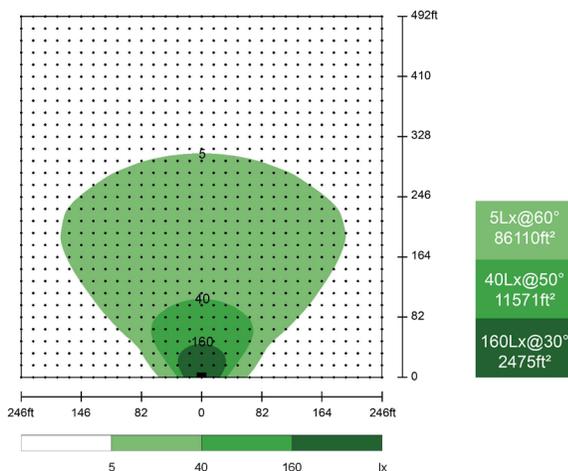

GPUSA-GP56K-H-Eco-Hybrid-V4-1125