





KEY FEATURES

Globe Power's Daymaker GP86K Solar Lighting Tower has been built to suit various industries and is compliant with metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Jack pads
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Tilt sensor
- Wheel chocks
- Fork pockets
- Lifting points



 USER-FRIENDLY
OPERATION INTERFACE

 SOLAR & ADVANCED
LITHIUM ION BATTERY

 PORTABLE & EASY TO
TRANSPORT

 AUSTRALIAN DESIGNED
& ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

Model	Daymaker GP86K
Lumen Output	86,000
Mast Height	29.5 feet
Mast Type	Hydraulic/Cable
Lights	4 x 200w LED Modules (Dimmable)
Coverage	426.5 x 426.5ft at 5 lux

OPERATIONAL DATA


Wind Rating	62.1 mph
Working Temperature	32° to 122°F
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	15.4kWh Lithium LFP
Run Time	34 hours
Solar	1.8kWp
Solar Tilt	30°
Solar Efficiency	1 hr of sun/3 hrs of light

UNIT INFORMATION

Dimensions (Transport)	144.1" x 88.2" x 115.4" (LxWxH)
Dimensions (Deployed)	141.7" x 172.0" x 381.9" (LxWxH)
Weight	3,748lbs
Trailer Type	Single Axle
Security	Wheel/hitch locks, wheel clamp, security wheel nuts

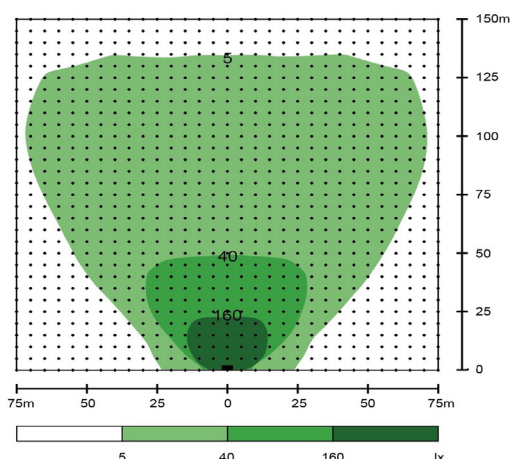

5Lx@60°	13788m²
40Lx@50°	2242m²
160Lx@35°	970m²