

SOLAR LIGHTING TOWER GP86K DAYMAKER



Globe Power's Daymaker GP86K Solar Lighting Tower has been built to suit various industries and is compliant with metropolitan and mining specifications.

- 7 day timer
- Day/night modes
- Jack pads
- Fire extinguisher
- Emergency stop
- Isolators
- AC charger
- Tilt sensor
- Wheel chocks
- Fork pockets
- Lifting points



USER-FRIENDLY OPERATION INTERFACE

SOLAR & LITHIUM IRON PHOSPHATE BATTERY

PORTABLE & EASY TO TRANSPORT

AUSTRALIAN DESIGNED & ENGINEERED

PRODUCT SPECIFICATIONS

GENERAL

Model	GP86K Daymaker
Lumen Output	91,000
Mast Height	30 feet
Mast Type	Hydraulic/Cable
Lights	4 x 200w LED Modules (Dimmable)
Coverage	144,236ft ² at 5 lux

OPERATIONAL DATA


Wind Rating	62mph
Working Temperature	32° to 122°F
Light Bar Tilt	0 to 90° Electric
Light Bar Rotation	355° Electric
Stabiliser Supports	4 x Manual

BATTERY

Battery	17.7kWh Lithium LiFePO4
Run Time	39 hours
Solar	1.8kWp
Solar Tilt	30°
Solar Efficiency	1 hr of sun/3 hrs of light

UNIT INFORMATION

Dimensions (Transport)	144" x 88" x 115" (LxWxH)
Dimensions (Deployed)	142" x 172" x 382" (LxWxH)
Weight	3,748lbs
Trailer Type	Single Axle
Security	Wheel/hitch locks, wheel clamp, security wheel nuts

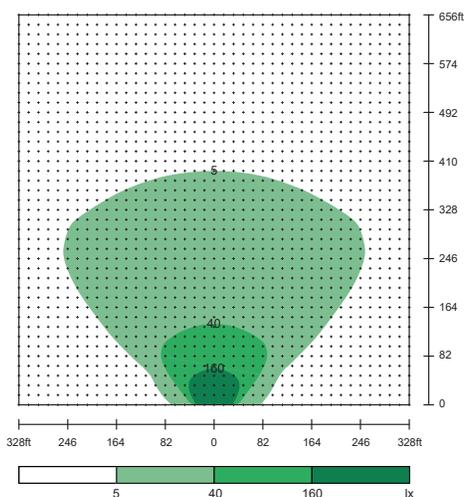

GPUSA-GP86K-Daymaker-V4-1125